


ORDERING INFORMATION

| Body Material | Connection Type | Tube Material | Float Material | Seal Material |
|---------------|-----------------|---------------|----------------|---------------|
| S SS304 | J JIS 10K | G GLASS | S SS304 | N NEOPRENE |
| W SS316 | A ANSI 150LB | P PC | W SS316 | V VITON |
| V P.V.C | P PT | | V P.V.C | |
| P P.P | N NPT | | P P.P | |
| D P.V.D.F | O OTHER | | D P.V.D.F | |
| I CS | | | C C.P.V.C | |
| C C.P.V.C | | | T TEFLON | |

| Fluid Type | Connection Size | | | Alarm Switch |
|------------|-----------------|-----------|---------|--------------|
| L LIQUID | 10 3/8" | 40 1 1/2" | 125 5" | N NONE |
| A AIR | 15 1/2" | 50 2" | 150 6" | H HI |
| | 20 3/4" | 65 2 1/2" | 200 8" | L LO |
| | 25 1" | 80 3" | 250 10" | A HI LO |
| | 32 1 1/4" | 100 4" | 300 12" | |

| Tube Size | Normal Standard Range | | L (mm) | |
|-----------|-----------------------|------------|--------|-----|
| | WATER M3/HR | AIR NM3/HR | DPP | DPF |
| 15 | 0.2-1 | 2-10 | 80 | 50 |
| 20 | 0.5-3 | 4-25 | 80 | 50 |
| 25 | 0.7-5 | 6-40 | 100 | 50 |
| 32 | 1-8 | 10-60 | 100 | 50 |
| 40 | 2-10 | 15-100 | 120 | 50 |
| 50 | 4-20 | 30-200 | 120 | 50 |
| 65 | 6-40 | 50-300 | 120 | 50 |
| 80 | 7-50 | 70-400 | 120 | 50 |
| 100 | 15-100 | 150-800 | 160 | 50 |
| 125 | 30-150 | 250-1200 | | 50 |
| 150 | 40-200 | 300-1800 | | 50 |
| 200 | 50-300 | 600-3000 | | 50 |
| 250 | 80-500 | 800-3000 | | 50 |
| 300 | 150-800 | 800-5000 | | 50 |

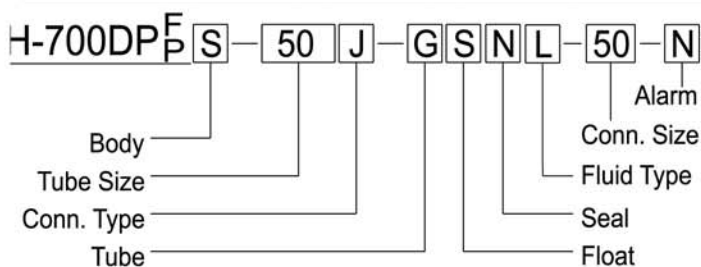

NOTE: (1)各尺寸流量，均可以依客戶需求訂製
(2) MODEL H-700DPP只製作到 4"

SPECIFICATIONS

| | |
|------------------|---------------------------|
| Max. Temperature | 60-100°C |
| Max. Pressure | 6-10 kg/cm ² G |
| Accuracy | ± 3% F.S |